



# AmericanBiltrite

DELIVERED BY

THE  KURIYAMA NETWORK



EDITION 0425



## AmericanBilrite A Century of American Craftmanship

Originally founded in 1908, the American Bilrite name and iconic logo are synonymous with reliable, high-quality rubber product manufacturing and innovation.

American Bilrite was an early pioneer of rubber flooring, developing various cutting edge rubber curing techniques. With their 400,000 square foot manufacturing facility, in-house R&D center and environmental testing capabilities, they continue to push the boundaries of rubber and vinyl technology.



*The American Bilrite Factory in Sherbrooke, Quebec*

## THE **KURIYAMA** DISTRIBUTION NETWORK



The Kuriyama Distribution Network services the United States through five primary distribution centers, totaling a footprint of 690,000 square feet. Long focused improving the complete customer experience, Kuriyama recently designed and built a state of the art 329,000 square foot Central Distribution Center in Huntley, IL, as well as a new 120,000 square foot Eastern Distribution Center in Carlisle, PA.

The partnership strategically combines American Bilrite's century-long manufacturing expertise with Kuriyama's extensive sales, customer service, warehousing and distribution network.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

Bilrite Built, Kuriyama Delivered .....	2
Beige Natural Rubber FDA Sheet.....	7-8
Black Fabric Reinforced Rubber SBR Cloth Inserted Packing.....	16-17
Black Fluoroelastomer (FKM) Sheet.....	11
Black Styrene-Butadiene Sheet .....	15
Black Vinyl TPE Matting .....	18
Cautionary Statement & Limited Warranty .....	Back Cover

Kuriyama Distribution Network.....	2
Red Fabric Finish Styrene-Butadiene Sheet .....	14
Red Natural Rubber Sheet .....	4
Red Smooth Finish Styrene-Butadiene Sheet.....	13
Tan Premium Natural Rubber Sheet.....	5-6
Terracotta Red Silicone Sheet.....	12
White Nitrile FDA Sheet.....	9-10

## INDEX BY SERIES NUMBER

Series	Page
AB-131	4
AB-135	5-6
AB-138	7-8
AB-366	9-10
IM-75	11
IM-S60	12

Series	Page
IM-618	13
IM-619	14
IM-166	15
IM-2100	16-17
MATTING	18

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.


## AMERICAN BILTRITE PART NUMBER SYSTEM

Use the guide below to understand part numbers in this catalog.

### MANUFACTURING LOCATION

AB-XXX vs. IM-XXX

- AB-XXX : Made in Canada (Domestic)
- IM-XXX : Made in China (Imported)

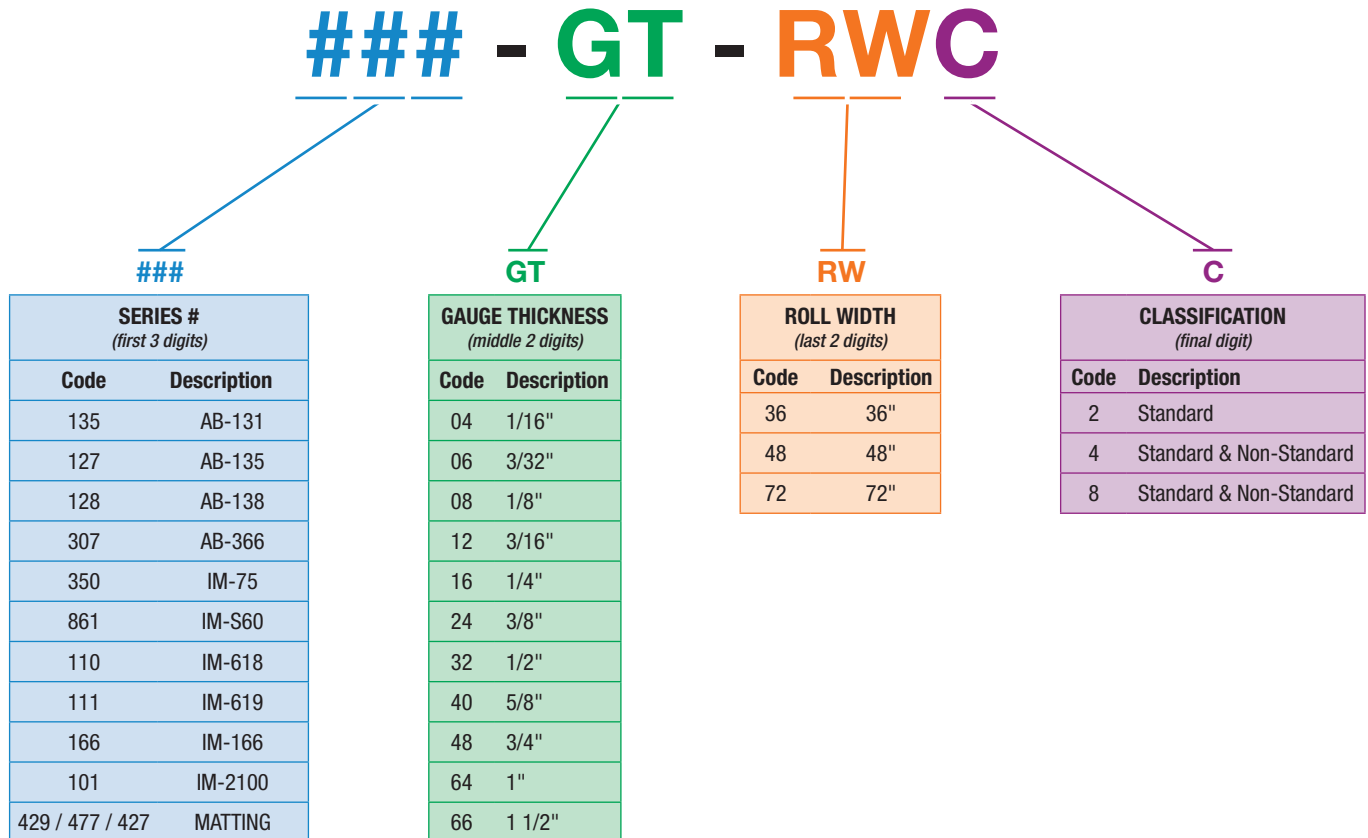

### EXAMPLE PART NUMBER

AB-131 Series  
**135-08-482**

### PART NUMBER BREAKDOWN

- 135** — Correlates to the Series Number (135 = AB-131)
- 08** — Correlates to the Gauge Thickness (08 = 1/8")
- 48** — Correlates to Width (48 = 48" wide)
- 2** — Correlates to Classification – Standard vs. Non-Standard Item (2 = Standard item)

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



## AB-131 Series *(Natural Rubber)*

### Red Sheet

#### GENERAL PROPERTIES

- High tensile strength
- Cut, tear, and abrasion resistant
- Rebound elasticity
- Flexibility
- Good adhesion with proper surface prep
- Softer feel for squeegee

View Up To Date Info






◀ SCAN OR VISIT  
[KOA.link/AB-131](https://koya.link/AB-131)

#### POLYMER

Natural Rubber (NR)

Series	ASTM Specification (SI units)	Temperature Range	Durometer	Tensile Strength (psi)	Elongation (%)
AB-131	D2000: 2AA325A13F17Z1	-20° to 180°F (-29° to 82°C)	35	2500 min.	500 min.

#### ASTM D2000 SPECIFICATION AND TESTS

ASTM	Description	Value
 D2137	Cold Temperature	-40°C/°F min.
 D395 (Method B)	Compression Set 22 hrs @ 70°C (158°F)	50% max.
 D573	Heat Aging 70 hrs @ 70°C (158°F)	Hardness: +/-15 Tensile (%): +/-30 max. Elongation (%): -50 max.

#### ADDITIONAL SPECIFICATIONS

Grade	Industrial
Finish	Smooth
Powder	Yes
Color	Red

Item Number	Gauge x Width (in)	Avg. Length (Linear Ft. /Roll)	Surface (sft)	Approx. Lbs./Roll
135-08-482	1/8 x 48	80	320	213
135-12-482	3/16 x 48	60	240	228
135-16-482	1/4 x 48	40	160	203
135-24-482	3/8 x 48	30	120	226

Minimum piece length: 10' • Width tolerance: -0 / +1"

Material is within commercial sheet rubber gauge tolerances.

The documentation for sheet rubber gauge tolerances is published on our website. Please ensure the product meets your application specification prior to order placement

Specifications are subject to change without notice. The website version prevails.

Total roll length may vary by ±10% for domestically manufactured (AB-131) Series.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.





## AB-135 Series *(Natural Rubber)*

### Tan Premium Sheet

#### GENERAL PROPERTIES

- Superior tensile strength for demanding applications
- Cut, tear and abrasion resistant
- Rebound elasticity (snap)
- Flexibility
- Good adhesion with proper surface prep

View Up To Date Info







◀ SCAN OR VISIT  
[KOA.link/  
AB-135](https://koya.link/AB-135)

#### POLYMER

Natural Rubber (NR)

Series	ASTM Specification (SI units)	Temperature Range	Durometer	Tensile Strength (psi)	Elongation (%)
AB-135	D2000: 2AA425A13F17	-20° to 180°F (-29° to 82°C)	40	2500 min.	400 min.

#### ASTM D2000 SPECIFICATION AND TESTS

ASTM	Description	Value
 DIN Abrasion Method 53516		Wet: 39 mm3 Dry: 176 mm3
 D2137	Cold Temperature	-40°C/°F min.
 D395 (Method B)	Compression Set 22 hrs @ 70°C (158°F)	50% max.
 D573	Heat Aging 70 hrs @ 70°C (158°F)	Hardness: +/-15 Tensile (%): +/-30 max. Elongation (%): -50 max.

#### ADDITIONAL SPECIFICATIONS

Grade	Premium
Finish	Smooth
Powder	Yes
Color	Tan

Item Number	Gauge x Width (in)	Avg. Length (Linear Ft. /Roll)	Surface (sft)	Approx. Lbs./Roll
127-04-362*	1/16 x 36	100	300	97
127-04-482*	1/16 x 48	100	400	130
127-06-482*	3/32 x 48	75	300	152
127-08-362	1/8 x 36	50	150	108
127-08-482	1/8 x 48	50	200	144
127-12-362*	3/16 x 36	40	120	123

*continued*

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



## AB-135 Series *(Natural Rubber)*

### Tan Premium Sheet

*continued from page 6*

Item Number	Gauge x Width (in)	Avg. Length (Linear Ft. /Roll)	Surface (sft)	Approx. Lbs./Roll
127-12-482	3/16 x 48	40	160	164
127-16-362	1/4 x 36	40	120	164
127-16-482	1/4 x 48	40	160	219
127-24-362*	3/8 x 36	30	90	183
127-24-482	3/8 x 48	30	120	243
127-32-362	1/2 x 36	50	150	407
127-32-482	1/2 x 48	50	200	542
127-48-362*	3/4 x 36	30	90	361
127-48-488*	3/4 x 48	30	120	481
127-64-368	1 x 36	30	90	486

\*Non-stocked size. Made to order with required number of rolls. Longer lead time applies. Contact Kuriyama Customer Service for details.

Maximum pieces per roll: 2 • Minimum piece length: 10' • Width tolerance: -0 / +1"

Material is within commercial sheet rubber gauge tolerances.

The documentation for sheet rubber gauge tolerances is published on our website.

Please ensure the product meets your application specification prior to order placement.

The website version prevails.

Total roll length may vary by  $\pm 10\%$  for domestically manufactured (AB-135) Series.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



## AB-138 Series (Natural Rubber)

### Beige FDA Sheet



#### GENERAL PROPERTIES

- Reliable tensile strength for everyday industrial use
- Tear and abrasion resistant
- Easier buffing
- Good adhesion with proper surface prep
- FDA Grade, meets the requirement for FDA 21 CFR 177.2600

View Up To Date Info






◀ SCAN OR VISIT  
[KOA.link/AB-138](https://KOA.link/AB-138)

#### POLYMER

Natural Rubber (NR)

Series	ASTM Specification (SI units)	Temperature Range	Durometer	Tensile Strength (psi)	Elongation (%)
AB-138	D2000 : 2AA420A13F17	-20° to 180°F (-29° to 82°C)	40	2000 min. 2500 typical	400 min. 700 typical

#### ASTM D2000 SPECIFICATION AND TESTS

ASTM	Description	Value
 D2137	Cold Temperature	-40°C/°F min.
 D395 (Method B)	Compression Set 22 hrs @ 70°C (158°F)	50% max.
 D573	Heat Aging 70 hrs @ 70°C (158°F)	Hardness: +/-15 Tensile (%): +/-30 max. Elongation (%): -50 max.

#### ADDITIONAL SPECIFICATIONS

Grade	Industrial
Finish	Smooth
Powder	Yes
Color	Beige

Item Number	Gauge x Width (in)	Avg. Length (Linear Ft. /Roll)	Surface (sft)	Approx. Lbs./Roll
128-04-362	1/16 x 36	100	300	106
128-04-482	1/16 x 48	100	400	141
128-06-362*	3/32 x 36	75	225	121
128-08-362	1/8 x 36	50	150	117
128-08-482	1/8 x 48	50	200	156
128-12-362	3/16 x 36	40	120	134
128-12-482	3/16 x 48	40	160	178
128-16-362	1/4 x 36	40	120	178
128-16-482	1/4 x 48	40	160	237

continued

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.





## AB-138 Series (Natural Rubber)

### Beige FDA Sheet



continued from page 8

Item Number	Gauge x Width (in)	Avg. Length (Linear Ft. /Roll)	Surface (sft)	Approx. Lbs./Roll
128-24-362*	3/8 x 36	30	90	198
128-24-482	3/8 x 48	30	120	264
128-32-362	1/2 x 36	50	150	441
128-32-482	1/2 x 48	50	200	588
128-40-362*	5/8 x 36	30	90	331
128-40-482*	5/8 x 48	30	120	441
128-48-362	3/4 x 36	30	90	392
128-48-482	3/4 x 48	30	120	522
128-64-362	1 x 36	30	90	528
128-64-482	1 x 48	25	100	588
128-64-482	1 x 48	25	100	588

\*Non-stocked size. Made to order with required number of rolls. Longer lead time applies. Contact Kuriyama Customer Service for details.

Maximum pieces per roll: 2 • Minimum piece length: 10' • Width tolerance: -0 / +1"

Meets the requirements for FDA 21 CFR 177.2600: "Rubber articles intended for repeated use may be safely used in producing, manufacturing, packing, processing, preparing, treating, packaging, transporting, or holding food, subject to the provisions of this section."

Material is within commercial sheet rubber gauge tolerances.

The documentation for sheet rubber gauge tolerances is published on our website.

Typical values do not constitute a specification. Please ensure the product meets your application specification prior to order placement. Specifications are subject to change without notice. The website version prevails.

Total roll length may vary by  $\pm 10\%$  for domestically manufactured (AB-138) Series.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



## AB-366 Series (Nitrile)

### White FDA Sheet



#### GENERAL PROPERTIES

- FDA Grade, meets FDA 21 CFR 177.2600 as well as Dairy 3A Specs
- Excellent resistance to petroleum-based hydraulic fluids
- Wide range of service temperatures
- Very good resistance to alkalis and acids

View Up To Date Info






◀ SCAN OR VISIT  
[KOA.link/AB-366](https://koi.link/AB-366)

#### POLYMER

Nitrile (NBR), Styrene-Butadiene (SBR)

Series	ASTM Specification (SI units)	Temperature Range	Durometer	Tensile Strength (psi)	Elongation (%)
AB-366	D2000 : 1BF610 FDA Compliant	-40° to 200°F (-40° to 93°C)	60	1000 min.	300 min.

#### ASTM D2000 SPECIFICATION AND TESTS

ASTM	Description	Value
 D395 (Method B)	Compression Set 22 hrs @ 100°C (212°F)	50% max.
 D573	Heat Aging 70 hrs @ 100°C (212°F)	Hardness: +/-15 Tensile (%): +/-30 max. Elongation (%): -50 max.
 D471	Oil Resistance Oil #3, 70 hrs @ 100°C (212°F)	Volume (%): 60 max.

#### ADDITIONAL SPECIFICATIONS

Grade	Industrial
Finish	Smooth
Powder	No
Color	White

Item Number	Gauge x Width (in)	Avg. Length (Linear Ft. /Roll)	Surface (sft)	Approx. Lbs./Roll
307-04-362	1/16 x 36	100	300	141
307-04-482	1/16 x 48	100	400	179
307-06-362*	3/32 x 36	75	225	154
307-08-362	1/8 x 36	50	150	144
307-08-482	1/8 x 48	50	200	192

continued

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



## AB-366 Series (Nitrile)

### White FDA Sheet



*continued from page 10*

Item Number	Gauge x Width (in)	Avg. Length (Linear Ft. /Roll)	Surface (sft)	Approx. Lbs./Roll
307-12-362	3/16 x 36	40	120	168
307-12-482	3/16 x 48	40	160	223
307-16-362	1/4 x 36	40	120	225
307-16-482	1/4 x 48	40	160	300
307-24-482	3/8 x 48	30	120	336
307-32-482	1/2 x 48	30	120	452

\*Non-stocked size. Made to order with required number of rolls. Longer lead time applies. Contact Kuriyama Customer Service for details.

Maximum pieces per roll: 2 • Minimum piece length: 10' • Width tolerance: -0 / +1"

Meets the requirements for FDA 21 CFR 177.2600: "Rubber articles intended for repeated use may be safely used in producing, manufacturing, packing, processing, preparing, treating, packaging, transporting, or holding food, subject to the provisions of this section."

Material is within commercial sheet rubber gauge tolerances.

The documentation for sheet rubber gauge tolerances is published on our website.

Please ensure the product meets your application specification prior to order placement.

The website version prevails.

Total roll length may vary by  $\pm 10\%$  for domestically manufactured (AB-366) Series.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

# IM-75 Series (Fluoroelastomer – FKM)

## Black Sheet

View Up To Date Info



◀ SCAN OR VISIT  
[KOA.link/IM-75](https://KOA.link/IM-75)

### GENERAL PROPERTIES

- Excellent sealing capability in aggressive environments
- Excellent chemical resistance
- UV & ozone resistant
- Resistant to liquid permeation in severe conditions
- Cinnamon scented for easy identification

### POLYMER

Fluoroelastomer (FKM)

Series	ASTM Specification (SI units)	Temperature Range	Durometer	Tensile Strength (psi)	Elongation (%)
IM-75	ASTM D2240	-20° to 450°F (-29° to 232°C)	75 +/- 5	1000 min.	225 min.

### ADDITIONAL SPECIFICATIONS

Grade	Industrial
Finish	Smooth
Powder	No
Color	Black

Item Number	Gauge x Width (in)	Avg. Length (Linear Ft. /Roll)	Surface (sft)	Approx. Lbs./Roll
350-04-482	1/16 x 48	50	200	150
350-08-482	1/8 x 48	51	204	286
350-12-482	3/16 x 48	20	80	152
350-16-482	1/4 x 48	20	80	202

Material is within commercial sheet rubber gauge tolerances.

The documentation for sheet rubber gauge tolerances is published on our website.

Please ensure the product meets your application specification prior to order placement.

Specifications are subject to change without notice. The website version prevails.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

# IM-S60 Series *(Silicone)*

## Terracotta Red Sheet

### GENERAL PROPERTIES

- Excellent resistance to extreme temperatures
- High tear resistance
- Low compression set
- Excellent resistance to UV, ozone, and weathering
- Resists most fluids encountered in general industrial applications

View Up To Date Info



◀ SCAN OR VISIT  
[KOA.link/IM-S60](https://KOA.link/IM-S60)

### POLYMER

Silicone Rubber

Series	ASTM Specification (SI units)	Temperature Range	Durometer	Tensile Strength (psi)	Elongation (%)
IM-S60	ASTM D2240	-80° to 450°F (-62° to 232°C)	60 +/- 5	800 typical	400 typical

### ADDITIONAL SPECIFICATIONS

Grade	Industrial
Finish	Smooth
Powder	No
Color	Terracotta red

Item Number	Gauge x Width (in)	Avg. Length (Linear Ft. /Roll)	Surface (sft)	Approx. Lbs./Roll
861-04-362	1/16 x 36	50	150	61
861-08-362	1/8 x 36	50	150	122
861-08-482	1/8 x 48	50	200	164
861-16-362	1/4 x 36	50	150	245

The maximum temperature is for instantaneous and not continuous applications.

Material is within commercial sheet rubber gauge tolerances.

The documentation for sheet rubber gauge tolerances is published on our website.

Typical values do not constitute a specification.

Please ensure the product meets your application specification prior to order placement.

Specifications are subject to change without notice. The website version prevails.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.





## IM-618 Series (*Styrene-Butadiene*)

### Smooth Finish Red Sheet

#### GENERAL PROPERTIES

- Industrial blend SBR for gaskets

#### POLYMER

Styrene-Butadiene (SBR)

[View Up To Date Info](#)



◀ SCAN OR VISIT  
[KOA.link/  
IM-618](https://koi.link/IM-618)

Series	ASTM Specification (SI units)	Temperature Range	Durometer	Tensile Strength (psi)	Elongation (%)
IM-618	ASTM D2240	-20° to 180°F (-29° to 82°C)	75 +/- 7	400 typical	220 typical

#### ADDITIONAL SPECIFICATIONS

Grade	Industrial
Finish	Smooth
Powder	No
Color	Red

Item Number	Gauge x Width (in)	Avg. Length (Linear Ft. /Roll)	Surface (sft)	Approx. Lbs./Roll
110-04-368	1/16 x 36	70	210	119
110-04-488	1/16 x 48	50	200	113
110-04-728*	1/16 x 72	70	420	233
110-06-368*	3/32 x 36	55	165	140
110-08-368	1/8 x 36	35	105	119
110-08-488	1/8 x 48	25	100	113
110-08-728	1/8 x 72	35	210	238
110-12-368*	3/16 x 36	50	150	254
110-12-488*	3/16 x 48	35	140	237
110-16-368	1/4 x 36	35	105	237
110-16-488	1/4 x 48	25	100	226
110-16-728*	1/4 x 72	20	120	271

\*Non-stocked size. Made to order with required number of rolls. Longer lead time applies. Contact Kuriyama Customer Service for details.

Maximum pieces per roll: 1 • Width tolerance: -0 / +1" • Durometer tolerance: +/-7 points

Material is within commercial sheet rubber gauge tolerances.

The documentation for sheet rubber gauge tolerances is published on our website.

Typical values do not constitute a specification.

Please ensure the product meets your application specification prior to order placement. Specifications are subject to change without notice. The website version prevails.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



## IM-619 Series *(Styrene-Butadiene)*

### Fabric Finish Red Sheet

#### GENERAL PROPERTIES

- Industrial SBR for gaskets

#### POLYMER

Styrene-Butadiene (SBR)

View Up To Date Info



◀ SCAN OR VISIT

[KOA.link/  
IM-619](https://KOA.link/IM-619)

Series	ASTM Specification (SI units)	Temperature Range	Durometer	Tensile Strength (psi)	Elongation (%)
IM-619	ASTM D2240	-20° to 180°F (-29° to 82°C)	75 +/- 7	400 typical	220 typical


#### ADDITIONAL SPECIFICATIONS

Grade	Industrial
Finish	Fabric
Powder	No
Color	Red

Item Number	Gauge x Width (in)	Avg. Length (Linear Ft. /Roll)	Surface (sft)	Approx. Lbs./Roll
111-04-368	1/16 x 36	70	210	119
111-04-488	1/16 x 48	50	200	113
111-08-368	1/8 x 36	35	105	119
111-08-488	1/8 x 48	25	100	113
111-12-368	3/16 x 36	50	150	254
111-16-368	1/4 x 36	35	105	237
111-16-488	1/4 x 48	25	100	226

Maximum pieces per roll: 2 • Minimum piece length: 5' • Width tolerance: -0.5 / +1"  
 Material is within commercial sheet rubber gauge tolerances.  
 The documentation for sheet rubber gauge tolerances is published on our website.  
 Please ensure the product meets your application specification prior to order placement.  
 Specifications are subject to change without notice. The website version prevails.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

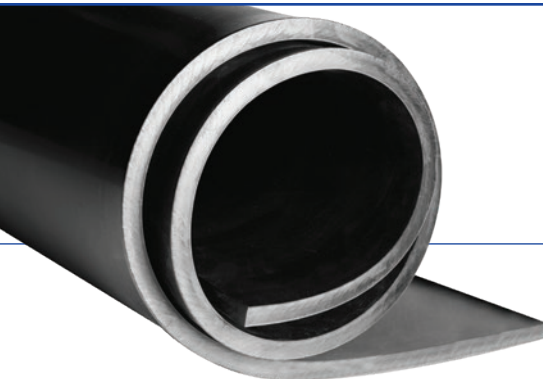

## IM-166 Series (*Styrene-Butadiene*)

### Black Sheet

#### GENERAL PROPERTIES

- Abrasion resistant
- Flexibility

#### POLYMER

Styrene-Butadiene (SBR)

View Up To Date Info



◀ SCAN OR VISIT  
[KOA.link/  
IM-166](https://KOA.link/IM-166)

Series	ASTM Specification (SI units)	Temperature Range	Durometer	Tensile Strength (psi)	Elongation (%)
IM-166	ASTM D2240	-20° to 180°F (-29° to 82°C)	60 +/- 7	500 typical	300 typical

#### ADDITIONAL SPECIFICATIONS

Grade	Commercial
Finish	Smooth
Powder	No
Color	Black


Item Number	Gauge x Width (in)	Avg. Length (Linear Ft. /Roll)	Surface (sft)	Approx. Lbs./Roll
166-04-484	1/16 x 48	50	200	90
166-08-364*	1/8 x 36	50	150	134
166-08-484	1/8 x 48	50	200	178
166-08-724*	1/8 x 72	35	210	188
166-16-484	1/4 x 48	50	200	354
166-24-484	3/8 x 48	50	200	528
166-32-484	1/2 x 48	50	200	702
166-48-484	3/4 x 48	50	200	1054
166-64-484	1 x 48	50	200	1404
166-66-484*	1.5 x 48	50	200	2341

\*Non-stocked size. Made to order with required number of rolls. Longer lead time applies. Contact Kuriyama Customer Service for details.

Maximum pieces per roll: 1 • Width tolerance: +/-0.177" • Durometer tolerance: +/-7 points

Material is within commercial sheet rubber gauge tolerances. The documentation for sheet rubber gauge tolerances is published on our website. Typical values do not constitute a specification. Please ensure the product meets your application specification prior to order placement. The website version prevails.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

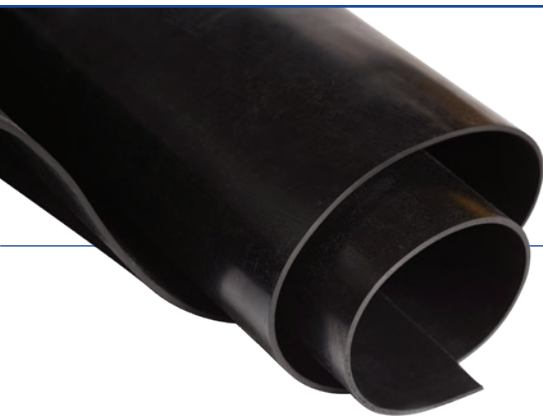

## IM-2100 Series *(Fabric Reinforced Rubber)*

### Black SBR Cloth Inserted Packing

#### GENERAL PROPERTIES

- An SBR fabric reinforced sheet
- For use in applications where the stresses are generally static in nature
- One to four plies of nylon fabric

#### POLYMER

Styrene-Butadiene (SBR)

View Up To Date Info



◀ SCAN OR VISIT  
[KOA.link/](https://koya.link/IM-2100)  
**IM-2100**

Series	ASTM Specification (SI units)	Temperature Range	Durometer	Tensile Strength (psi)	Elongation (%)
IM-2100	ASTM D2240	-20° to 180°F (-29° to 82°C)	65 +/- 7	500 typical	250 min.


#### ADDITIONAL SPECIFICATIONS

Grade	Commercial
Finish	Smooth
Powder	No
Color	Black
Fabric	Nylon

Item Number	Gauge x Width (in)	Fabric Plies	Avg. Length (Linear Ft. /Roll)	Surface (sft)	Approx. Lbs./Roll
101-04-362	1/16 x 36	1	100	300	148
101-04-482	1/16 x 48	1	100	400	197
101-08-362	1/8 x 36	2	50	150	148
101-08-482	1/8 x 48	2	50	200	197
101-12-362	3/16 x 36	3	40	120	177
101-12-482	3/16 x 48	3	40	160	236
101-16-362	1/4 x 36	4	40	120	236
101-16-482	1/4 x 48	4	40	160	315
102-08-362	1/8 x 36	1	50	150	148
102-08-482	1/8 x 48	1	50	200	197
102-12-362	3/16 x 36	2	40	120	177

*continued*

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

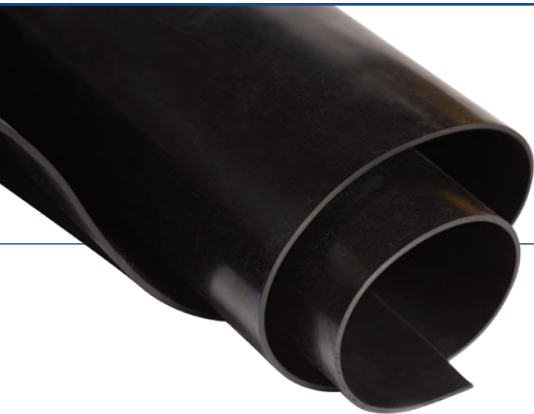

## IM-2100 Series *(Fabric Reinforced Rubber)*

### Black SBR Cloth Inserted Packing

*continued from page 17*

Item Number	Gauge x Width (in)	Fabric Plies	Avg. Length (Linear Ft. /Roll)	Surface (sft)	Approx. Lbs./Roll
102-12-482	3/16 x 48	2	40	160	236
102-16-362*	1/4 x 36	3	40	120	236
102-16-482	1/4 x 48	3	40	160	315

\*Non-stocked size. Made to order with required number of rolls. Longer lead time applies. Contact Kuriyama Customer Service for details.

Mullen Burst 1 Ply: 300 psi typical • Maximum pieces per roll: 1 • Width tolerance: +/-1" • Fabric: Nylon • Durometer tolerance +/-7

Material is within commercial sheet rubber gauge tolerances.

The documentation for sheet rubber gauge tolerances is published on our website.

Typical values do not constitute a specification.

Please ensure the product meets your application specification prior to order placement.

The website version prevails.

Physical properties based on rubber only.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.



# MATTING Series (TPE)

## Black Vinyl Matting

### GENERAL PROPERTIES

- Odorless utility mat
- 90% made with recycled materials
- Heavy duty, odorless, water-resistant, easy to clean, vinyl mix, fade proof, multi-purpose
- An ideal choice for gyms, workshops, campers, barns, animal keeps
- Three available profiles

View Up To Date Info



◀ SCAN OR VISIT  
[KOA.link/  
 MATTING](https://koi.link/MATTING)

**POLYMER**  
 TPE

### ASTM D2000 SPECIFICATION AND TESTS

ASTM	Description	Value
D2240	Hardness (shore A)	90
D412	Tensile (psi)	1200 min.
	Ultimate Elongation (%)	35 min.
D624	Tear Die C (lb/in)	110


### ADDITIONAL SPECIFICATIONS

Grade	Industrial
Finish	See Chart
Powder	No
Color	Black



#### ELDORADO - Rolls

Part Number	Gauge		Width		Surface/Roll		Length/Roll		Weight/Roll	
	(in)	(mm)	(in)	(mm)	Sq Ft	Sq M	Linear Ft.	Sq M	lbs	kg
429-08-364	1/8	3.20	36	914.4	225	20.1	75	22.86	220	99.8



#### DIAMOND - Rolls

Part Number	Gauge		Width		Surface/Roll		Length/Roll		Weight/Roll	
	(in)	(mm)	(in)	(mm)	Sq Ft	Sq M	Linear Ft.	Sq M	lbs	kg
477-08-364	1/8	3.20	36	914.4	225	20.1	75	22.86	220	99.8



#### CROCODILE - Rolls

Part Number	Gauge		Width		Surface/Roll		Length/Roll		Weight/Roll	
	(in)	(mm)	(in)	(mm)	Sq Ft	Sq M	Linear Ft.	Sq M	lbs	kg
427-08-364	1/8	3.20	36	914.4	225	20.1	75	22.86	220	99.8

Total roll length may vary by  $\pm 10\%$  for domestically manufactured Matting Series.

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

# Cautionary Statement

All Products sold and distributed by Kuriyama of America, Inc. are in the nature of commodities and they are sold by published specifications and not for particular purposes, uses or applications. Purchaser shall first determine their suitability for the intended purposes, uses or applications and shall either conduct its own engineering studies or tests, or retain qualified engineers, consultants or testing laboratories and consult with them before determining the proper use, suitability or propriety of the merchandise or Products for the intended purposes, uses or applications.

Kuriyama of America, Inc. ("Seller") does not recommend the Products for any particular purpose, use or application, and the Purchaser or user thereof shall assume full responsibility for the suitability, propriety, use and application of the Products. Purchaser shall follow all instructions contained in Seller's catalogs, brochures, technical bulletins and other documents regarding the Products. The Products, including but not limited to, hose, tubing or couplings, may fail due to the use or conveyance of substances at elevated or lowered temperatures or at excessive pressure, the conveyance of abrasive, injurious, flammable, explosive or damaging substances.

Hose or tubing used in bent configurations will be subjected to increased abrasion. Hose clamps or couplings may loosen after initial installation and all sections of hose and tubing including connections, couplings, clamps, conductivity and bonding should be inspected frequently, regularly and consistently, and should be replaced, adjusted or re-tightened for the avoidance of leakage, for the prevention of injuries or damages, and for general safety purposes. Except as indicated in its Limited Warranty, Seller shall not be liable or responsible for direct or indirect injuries or damages caused by or attributed to the failure or malfunction of any Products sold or distributed by it.

Purchasers or users of the Products should frequently and consistently undertake inspections and protective measures with respect to the use and application of Products, which should include the examination of tube and cover, conditions of the hose or tubing, and the identification, repair or replacement of sections showing cracking, blistering, separations, internal and external abrasions, leaking or slipped couplings or connections and make proper proof tests.

## Limited Warranty

The Products sold or distributed by Seller are warranted to its customers to be free from defects in material and workmanship at the time of shipment by us, subject to the following provisions. ALL WARRANTY CLAIMS SHALL BE MADE WITHIN SIX (6) MONTHS AFTER SELLER SHIPPED THE PRODUCTS. SELLER'S LIABILITY HEREUNDER IS LIMITED AT SELLER'S EXCLUSIVE DISCRETION, TO 1) THE PURCHASE PRICE OF ANY PRODUCTS PROVING DEFECTIVE; 2) REPAIR OF ANY DEFECTIVE PRODUCT OR PART THEREOF; OR 3) REPLACEMENT OF ANY DEFECTIVE PRODUCT OR PART UPON ITS AUTHORIZED RETURN TO SELLER.

THIS WARRANTY IS IN LIEU OF AND EXCLUDES ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, STATUTORY, OR OTHERWISE CREATED UNDER APPLICABLE LAW INCLUDING, BUT NOT LIMITED TO, THE WARRANTY OF MERCHANTABILITY AND THE WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT SHALL SELLER OR THE MANUFACTURER OF THE PRODUCT BE LIABLE FOR SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING LOSS OF PROFITS, WHETHER OR NOT CAUSED BY OR RESULTING FROM THE NEGLIGENCE OF SELLER AND/OR THE MANUFACTURER OF THE PRODUCT, UNLESS SPECIFICALLY PROVIDED HEREIN. IN ADDITION, THIS WARRANTY SHALL NOT APPLY TO ANY PRODUCTS OR PORTIONS THEREOF WHICH HAVE BEEN SUBJECTED TO ABUSE, MISUSE, IMPROPER INSTALLATION, MAINTENANCE, OR OPERATION, ELECTRICAL FAILURE OR ABNORMAL CONDITIONS, AND TO PRODUCTS WHICH HAVE BEEN TAMPERED WITH, ALTERED, MODIFIED, REPAIRED, REWORKED BY ANYONE NOT APPROVED BY SELLER, OR USED IN ANY MANNER INCONSISTENT WITH THE PROVISIONS OF THE "CAUTIONARY STATEMENT" ABOVE OR ANY INSTRUCTIONS OR SPECIFICATIONS PROVIDED WITH OR FOR THE PRODUCT. 05/03/21 REV

Distributed by:



### HEADQUARTERS AND SALES OFFICE

150 N Martingale Road, Suite 900, Schaumburg, IL 60173-5335  
Phone: (847) 755-0360 • Toll-free Fax: (800) 800-0320

International Fax: (847) 885-0996

[kuriyama.com](http://kuriyama.com)

[sales@kuriyama.com](mailto:sales@kuriyama.com)



The trademarks contained in this publication are trademarks of Kuriyama of America, Inc.

## SALES & WAREHOUSE LOCATIONS CENTRAL DISTRIBUTION CENTER

### KURIYAMA OF AMERICA, INC.

14200 Commerce Court  
Huntley, IL 60142

☎ (847) 755-0360

📠 (800) 800-0320

🌐 [kuriyama.com](http://kuriyama.com) ✉ [sales@kuriyama.com](mailto:sales@kuriyama.com)

## SOUTHWEST WAREHOUSE

### KURIYAMA OF AMERICA, INC.

#### - HOUSTON

200 Portwall Street, Suite 100  
Houston, TX 77029

☎ (713) 674-8212 OR ☎ (800) 501-6808

📠 (713) 674-5214 OR 📠 (800) 800-5214

✉ [sales@kuriyama.com](mailto:sales@kuriyama.com)

## WESTERN WAREHOUSE

### KURIYAMA OF AMERICA, INC.

#### - RENO

12910 Old Virginia Road, Suite 100  
Reno, NV 89521

☎ (562) 941-4507

📠 (562) 941-8940 OR 📠 (800) 326-8940

✉ [sales@kuriyama.com](mailto:sales@kuriyama.com)

## SOUTHEAST WAREHOUSE

### FORTNEY SALES CO., INC.

4221 Cantrell Road NW

Acworth, GA 30101

☎ (770) 427-6528

📠 (770) 423-9249 OR 📠 (800) 423-9249

🌐 [FortneySales.com](http://FortneySales.com) ✉ [sales@fortneysales.com](mailto:sales@fortneysales.com)

## EASTERN WAREHOUSE

### KURIYAMA OF AMERICA, INC.

#### - CARLISLE

1600 Distribution Drive, Building B

Carlisle, PA 17013

☎ (609) 758-0100

📠 (609) 758-0102 OR 📠 (800) 445-7138

✉ [sales@kuriyama.com](mailto:sales@kuriyama.com)

## IN MEXICO

### KURIYAMA DE MÉXICO S DE RL DE CV

Av Jose Palomo Martinez No 520-20 Bodega 5

Parque Industrial Omolap

Apodaca, N.I. CP:66633, México

☎ (81) 1086-1870 O 71

🌐 [Kuriyama.com.mx](http://Kuriyama.com.mx) 🌐 [Kuriyama.com](http://Kuriyama.com)

✉ [servicioalcliente@kuriyama.com](mailto:servicioalcliente@kuriyama.com)